

Stone Age Outdoor Fireplaces

See-Thru Models

Steps for construction:


1) Determine the height you want the Fire Box Floor off Finished grade. The legs #1 provided with the kit are 18" tall and put the Fire Box approx. 24" off of the finished grade. If that height is not desired, discard legs and build base out of concrete blocks.

2) Once the base is level and sq. set the baseplate #2. level it front to back and side to side. Then install pieces #3-#5 in order shown in the picture. Keep each piece level and plumb.

3) It is the easiest to install the Firebrick inside the Firebox AFTER piece #5 and before piece #7. Line the floor, then the back and then sides. Apply 1/4" thick layer cement to the back of brick and 1/4" mortar joint around the brick.
(NOTE: add extra cement to mixture when applying brick and add water to thin down mixture. You want your cement richer and wetter when applying Firebrick.)

4) Continue installation of pieces #7 thru #9. (Note: 48" units require #11 throat adapter, which mounts atop #8). When completed install hearth piece #10, if desired. You are now ready for exterior.


5) Unit should not be fired for 21 days after completion, to allow full curing of mortar.

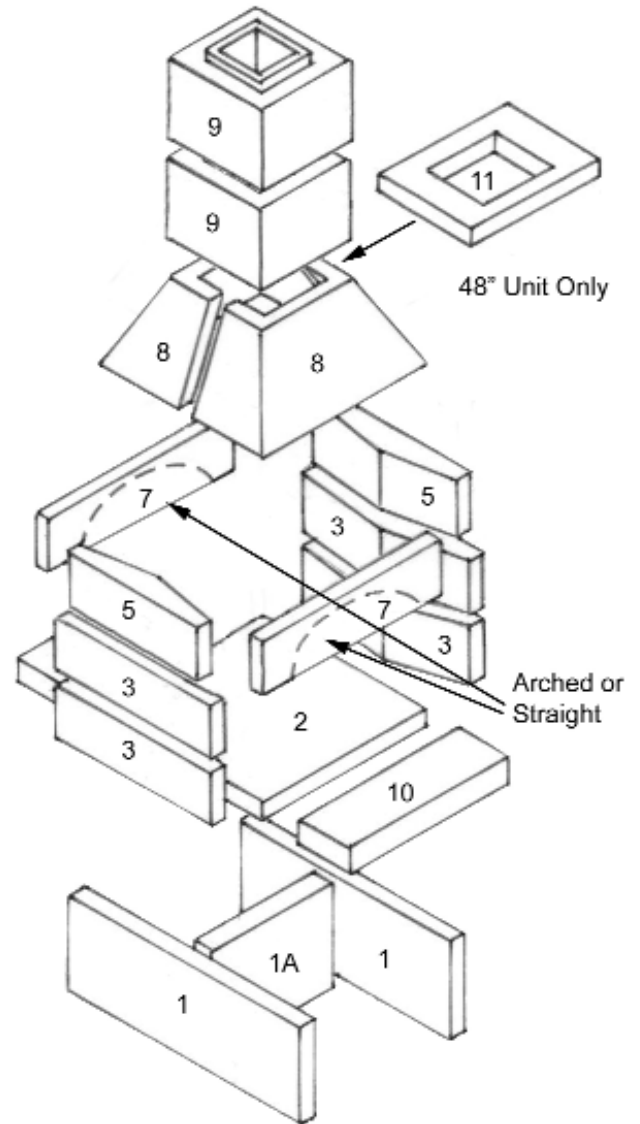

5) Unit should not be fired for 21 days after completion, to allow full curing of mortar.

24" S.T. 36" S.T. 48" S.T

	24" S.T.	36" S.T.	48" S.T.
#1A Leg	18"t x 27"d	18"t x 38"d	18"t x 51"d
#1 Legs	18"t x 50"d	18"t x 50"d	18"t x 50"d
#2 Baseplate	34"w x 33"d	46"w x 33"d	58"w x 33"d
#3 Sidewall	11"t x 33"d	11"t x 33"d	11"t x 33"d
#5 Top Sidewall	11"t x 26"d	11"t x 26"d	11"t x 26"d
#7 Front Header	11"t x 34"w	11"t x 45"w	11"t x 58"w
#8 Throat	23"sq.at top x16"t	23"sq.at top x16"t	23"d x 30"w x 16"t
#9 Flue	23"sq.x 12"t	23"sq.x 12"t	23"sq.x 12"t
#10 Hearth	11"d x5"t x 34"w	11"d x 5"t x 45"w	11"d x 5"t x 58"w
#11 Throat Adapter	N/A	N/A	23" d x 30" w x 4" t
Outside Dimensions	Legs - 50"d Firebox - 33"d Side to Side- 34" w	Legs - 50"d Firebox - 33"d Side to Side- 45" w	Legs - 50"d Firebox - 33"d Side to Side- 58" w
Firebox Opening Height	All Sizes	Arched: 27"t	Straight:23"t
Overall Height	7' 11" t	7' 11" t	8' 3" t
Overall Weight	2200 lbs.	2800 lbs.	3300 lbs.
Abbreviations	t=tall, sq=quare	d=depth - w=width -	from front to back from side to side

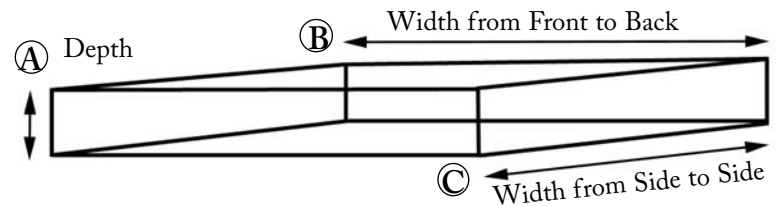

Minimum Requirement for Foundation		24"	36"	48"
Fabricated Stone Stucco, Stain or Tile	A	4" - 6"	6" - 8"	8" - 10"
	B	56"	56"	56"
	C	40"	52"	64"
Natural Stone or Brick	A	8" - 12"	12" - 18"	18" - 24"
	B	62"	62"	62"
	C	46"	58"	70"

Finishing Specifications:

24" - 71 SF of surface, including 32 LF of corners.

36" - 94 SF of surface, including 32 LF of corners.

48" - 118 SF of surface, including 32 LF of corners.